

## SB5560S 55A SCRs


### FEATURES

- High thermal cycling performance
- High voltage capacity
- Very high current surge capability

### APPLICATIONS

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power coil control
- Lighting and temperature control

### Parameters Summary

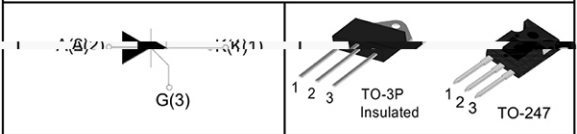**VD/VR:1200/1600V IT(RMS):55A IGT :60mA**


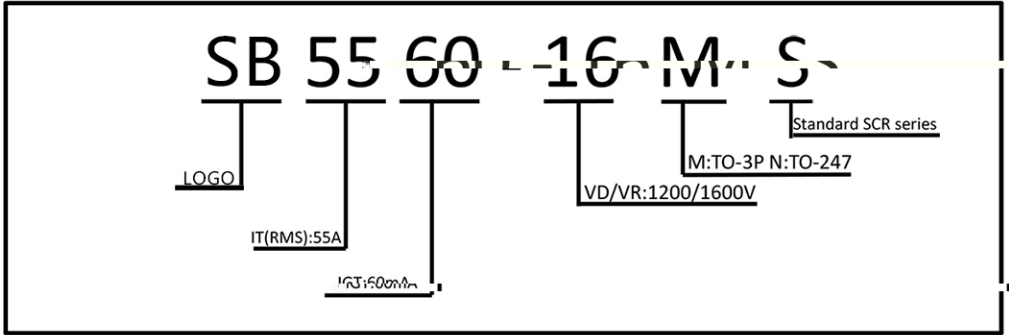
ABSOLUTE MAXIMUM RATINGS				
Parameter	Symbol	value	Unit	
Storage junction temperature range	Tstg	-40 ~ 150	°C	
Operating junction temperature range	Tj	-40 ~ 125	°C	
Repetitive peak off-state voltage (T=25°C)	V <sub>DRM</sub>	1200/1600	V	
Repetitive peak reverse voltage (T=25°C)	V <sub>RRM</sub>	1200/1600	V	
Non repetitive surge peak Off-state voltage	V <sub>DSM</sub>	V <sub>DRM</sub> +100	V	
Non repetitive peak reverse voltage	V <sub>RRSM</sub>	V <sub>RRM</sub> +100	V	
RMS on-state current	TO-3PIns.(TC=80°C)	I <sub>TSM</sub>	55	A
	TO-247(TC=85°C)			
Non repetitive surge peak on-state current	I <sub>TSM</sub>	550	A	
Average on-state current (180° conduction angle)	I <sub>T(AV)</sub>	35	A	
I <sup>2</sup> t value for fusing (tp=10ms)	I <sup>2</sup> t	1500	A <sup>2</sup> S	
Critical rate of rise of on-state current (I=2×IGT, tr ≤ 100 ns)	di/dt	150	A/μS	
Peak gate current	I <sub>GM</sub>	5	A	
Average gate power dissipation	P <sub>G(AV)</sub>	2	W	

Thermal Resistances				
Symbol	Parameter	Value	Unit	
Rth(j-c)	Junction to case (DC)	TO-3P	0.65	°C/W
		TO-247	0.60	


Symbol	Test Condition	Value
$V_{DRM}$	$V_D = V_{DRM}$ $T_j = 125^\circ\text{C}$	MIN. 60 MAX. 100
$V_{GD}$	$V_D = V_{DRM}$ $T_j = 125^\circ\text{C}$	MIN. 0.2 MAX. 0.5
$I_{T(RMS)}$	$I_a = 1.2 I_{T(RMS)}$	MAX. 250
$I_H$	$I_H = 50\text{mA}$	MAX. 200
$dV/dt$	$V_a = 2/3 V_{DRM}$ $f_{DRM} = 100\text{Hz}$ $T_j = 125^\circ\text{C}$	MIN. 1000

Symbol	Value
$V_{DRM}$	60-100
$V_{GD}$	0.2-0.5
$I_{T(RMS)}$	250
$I_H$	200
$dV/dt$	1000

### Ordering information Scheme




### TO-3P Package Mechanical Data

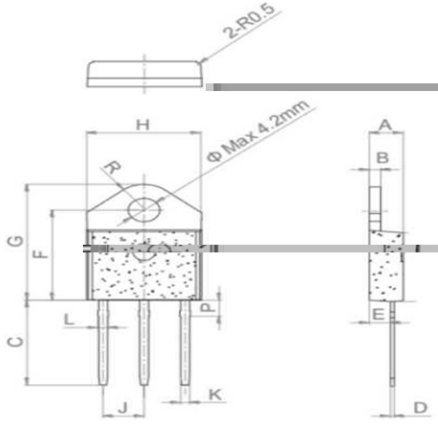

Ref.	Millimeters	Inches
A	1.60	0.063
B	1.60	0.063
C	1.48	0.058
D	0.70	0.027
E	0.70	0.027
F	1.60	0.063
G	1.60	0.063
H	1.15	0.045
J	1.14	0.045
K	1.30	0.051
L	1.28	0.050
P	1.60	0.063
R	1.60	0.063

## TO-247 Package Mechanical Data

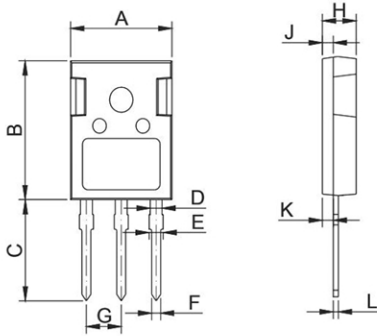

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.50	15.80	16.10	0.610	0.622	0.634
B	20.80	21.00	22.20	0.819	0.828	0.874
C	19.70	20.00	20.30	0.776	0.787	0.799
D	1.80	2.00	2.00	0.071	0.079	0.079
E	1.90	2.10	2.30	0.075	0.083	0.091
F	1.00	1.20	1.40	0.039	0.047	0.055
G		5.44			0.214	
H	4.80	5.00	5.20	0.189	0.197	0.205
J	1.90	2.00	2.10	0.075	0.079	0.083
K	2.20	2.35	2.50	0.087	0.093	0.098
L	0.41	0.60	0.79	0.016	0.024	0.031

FIG.1 Maximum power dissipation versus on-state current

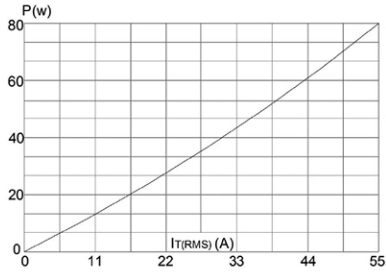


FIG.2: on-state current versus case temperature

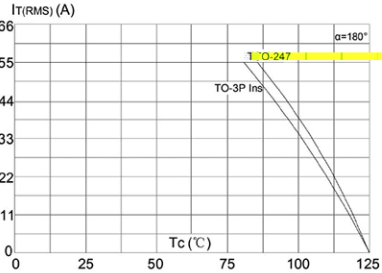


FIG.3: Surge peak on-state current versus number of cycles

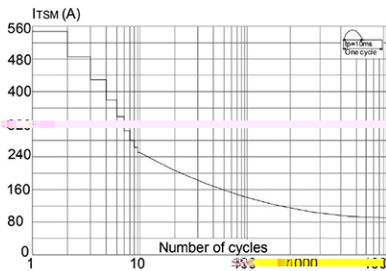


FIG.4: On-state characteristics (maximum values)

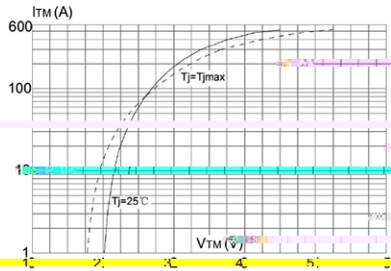


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 10\text{ms}$ , and corresponding value of  $1/2 t$

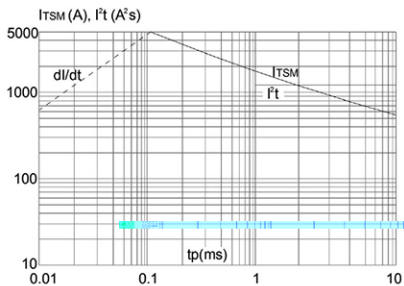


FIG.6: Relative variation of  $I_{GT}$  and  $I_{H\&L}$  versus junction temperature

